

Alcatel·Lucent 1


Alcatel OXO

MobiCall Features






MobiCall is the central software platform for alerting, evacuation, information distribution and positioning in a professional environment. Whether in the event of fire, emergency management, silent alarm or lone worker protectionn, MobiCall application offers tailor-made services and industry-specific solutions.

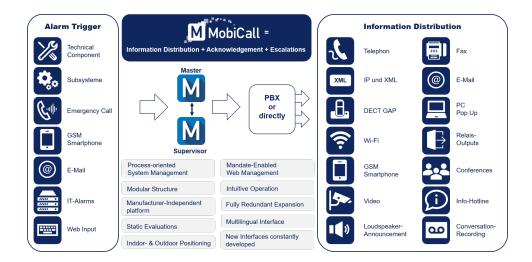

MobiCall is a high-performance platform for complex communication needs. **MobiBBox** is a compact solution for small and medium-sized businesses. **MobiCCloud** is a flexible web-based service for emergency communication, including alerting, mobilization, and information distribution.

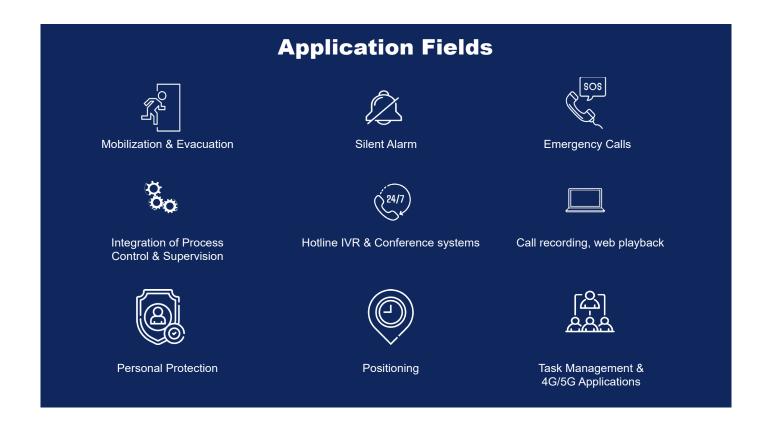







Alcatel OXO Features



Functionalities	OXO via SIP	OXO via ISVPN
Simultaneous channels	Without additional hardware up to 48 channels	Via BRA and PRA up to 48 channels
Alarm broadcasting in voice mode	✓	✓
Voice broadcasting via pre-recorded or	√	√
dynamic messages	v	v
Voice broadcasting by Text-To-Speech	√	\checkmark
engine	·	· ·
Alarm acknowledgement by DTMF mode	✓	✓
Message on screen when ringing	16 characters	16 to 32 characters
Conference management, multi	√	\checkmark
conferences	·	·
Conference recording on emergency calls	✓	✓
Alarm tones	Up to 4 ring tones*	Up to 4 ring tones*
Disconnection of the occupied caller to pass	✓	\checkmark
the alarm message	(via CSTA)	·
Broadcasting over station loudspeaker	DECT 8242	DECT 8242
Broadcasting over station loudspeaker via CSTA	✓	✓
Escalation on any media	Internal and external	Internal and external
PTI functions: Loss of verticality, immobility, shock	DECT 8242	DECT 8242
PTI functions: Emergency calls by dedicated key	DECT 8242	DECT 8242
Monitoring of the PTI terminal	DECT 8242	DECT 8242
(Presence,battery,)	DEG1 0242	DECT 0242
Login - Logout on charger input/output	DECT 8242	DECT 8242
Standard DECT localization (based on the	√	\checkmark
strongest transmitting antenna)		
PTI WIFI functions: Loss of verticality,	Via dedicated Wifi terminals or TAG	Via dedicated Wifi terminals or TAG
immobility, shocks, emergency calls		
WIFI localization by triangulation via API	,	,
geolocation platform Ekahau – Stanley –	✓	√
MSE		
XML integration sends alarms in text and image mode	✓	✓
CSTA integration (interactive terminal		
management)	✓	✓
Integration My IC Phone (HTML)	√	✓
PBX interface monitoring	✓	\checkmark







Switzerland:

New Voice SA Chemin du Joran 8B 1260 Nyon Tel: +41 58 750 11 20 Germany:

New Voice Systems GmbH Mörikestrasse 17 71636 Ludwigsburg Tel: +49 2131 266 85 50 France:

New Voice SARL 19 rue Corot 92410 Ville d'Avray Tel: +33 1 41 15 82 61



mobicall@newvoice.global



www.newvoice.global



